



Buy Our Product on



+91 956-922-7788

sales@jiwebtech.com

Unlock the Future of Home Security! Get started with jiSECURE today!



A SMART HOME IS A SAFE HOME

Proudly  
Designed,  
Developed &  
Manufactured in India



## Smart Door Lock Controller

Solutions for



Smart Home



Smart Industry



Smart City



Smart Office



## 1 What's in the box



## 2 Before Installation



**Turn OFF** the main power supply before installation.



Work on **2.4GHz** Wi-Fi only (5GHz not supported).



Installation by a qualified **electrician** is recommended.



For **indoor use** only keep away from water.

## 3 Safety Instructions

- ✓ Do not exceed the maximum load rating.
- ✓ Ensure proper wiring as per the guide.
- ✓ Keep the device in a dry and ventilated area.
- ✓ Do not open the device case.
- ✓ Turn off power before cleaning the device.

### Need Help?


Scan QR code to watch installation video.



## 4 Wiring Diagram & Installation

### Controller Wiring Guide

Refer to the diagram below for correct power supply, lock, and input/output wiring connections.

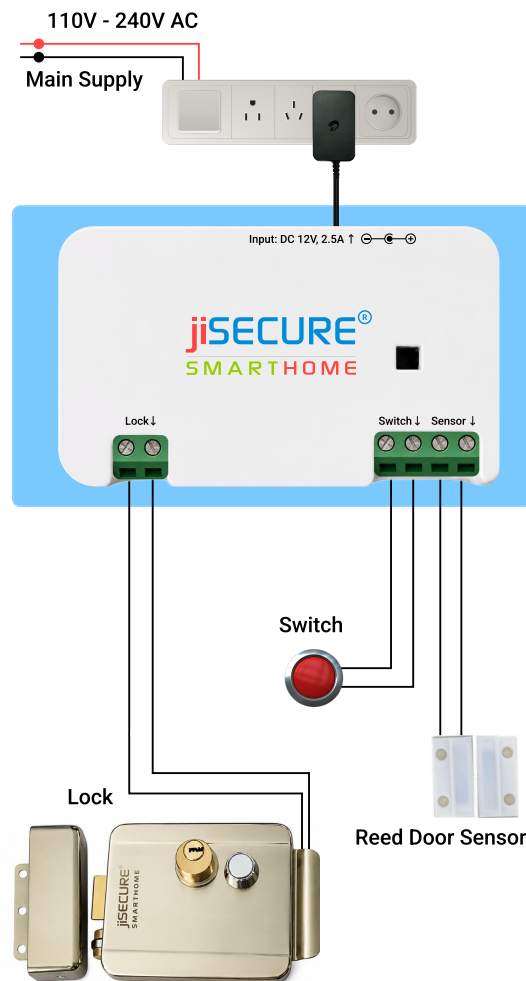

### Simple steps

- Step 1 :** Connect the electric door lock wires to the LOCK OUTPUT terminals of the controller.
- Step 2 :** Connect the controller to the required DC power supply.
- Step 3 :** Pair the controller with the app, add users, and test lock/unlock functionality.

## 5 LED Indication

| LED Status           | Meaning            |
|----------------------|--------------------|
| ● Blinking Green Red | Pairing Mode       |
| ● Solid Green        | Ready to use       |
| ● Blinking Red       | Pairing with BLE   |
| ● Solid Red          | Connected with BLE |

## 6 Reset Guide

**Step 1 :** Ensure the controller is powered ON.

**Step 2 :** Press and hold the Reset button for 5-7 seconds.

**Step 3 :** Release when the LED blinks, indicating Pairing Mode.

## 7 App Setup Guide

**1 Download App**  
Download the jiSECURE Smart Home app by scanning the QR code or searching

**2 Login/Sign Up**  
Create a new account or log in using your registered details

**3 Add Device**  
Tap the "+" icon or Add device button. Ensure green LED blinking in the device

**4 Connect to Wi-Fi**  
Select your 2.4 GHz Wi-Fi network, enter the password, and wait for the device to connect.

**5 Share Device**  
Easily share device access with family and authorized users.

**6 Set Schedule**  
Create timers and schedules to automate your appliances.

### Need Help?

Scan the QR code to watch the App Connection Guide.



## 8 Specifications

|                   |                            |
|-------------------|----------------------------|
| Model Number      | SHL285_WR                  |
| Device Type       | Smart Door Lock Controller |
| Input             | DC 12V = 2.5A              |
| Power             | <1W                        |
| Relay Module      | 1-Channel Relay Module     |
| Wireless Standard | Wi-Fi (2.54GHz only)       |
| Operation Temp.   | -20C to +70C               |
| Dimensions        | 92mm X 55mm X 25mm         |
| Weight            | 95gm                       |
| Warranty          | 12 Month                   |

## 9 Suitable For Electric Lock

- 🏠 Residential Main Door Access
- 🏢 Office & Commercial Entry Doors
- 🏠 Smart Home Door Automation
- 👉 Push Exit Buttons
- 🔒 Magnetic Door Locks
- 🔒 Access Control Systems

## 10 Do Not Use With

- ✗ High-Power AC Appliances
- ✗ Avoid Motors Without Relay Protection
- ✗ Electric Geysers / Water Heaters
- ✗ Electric Irons
- ✗ Not For Outdoor Installation
- ✗ High-Voltage Industrial Equipment

## 11 Customer Support

24/7 Customer Support

+91 95692 27788

support@jisecure.com

jisecure.com

